

UMBC


FACILITIES MANAGEMENT


PROJECT
**RETREAT CENTER
BUILDING B**
1000 HILLTOP CIRCLE
BALTIMORE, MD 21250

CLIENT
UMBC FACILITIES MANAGEMENT

REVISIONS		
NO.	DATE	DESCRIPTION

ISSUED FOR CONSTRUCTION
2026-09-24
PROJECT NO. 2026-0418
DRAWN BY: JMP CHECKED BY: RS

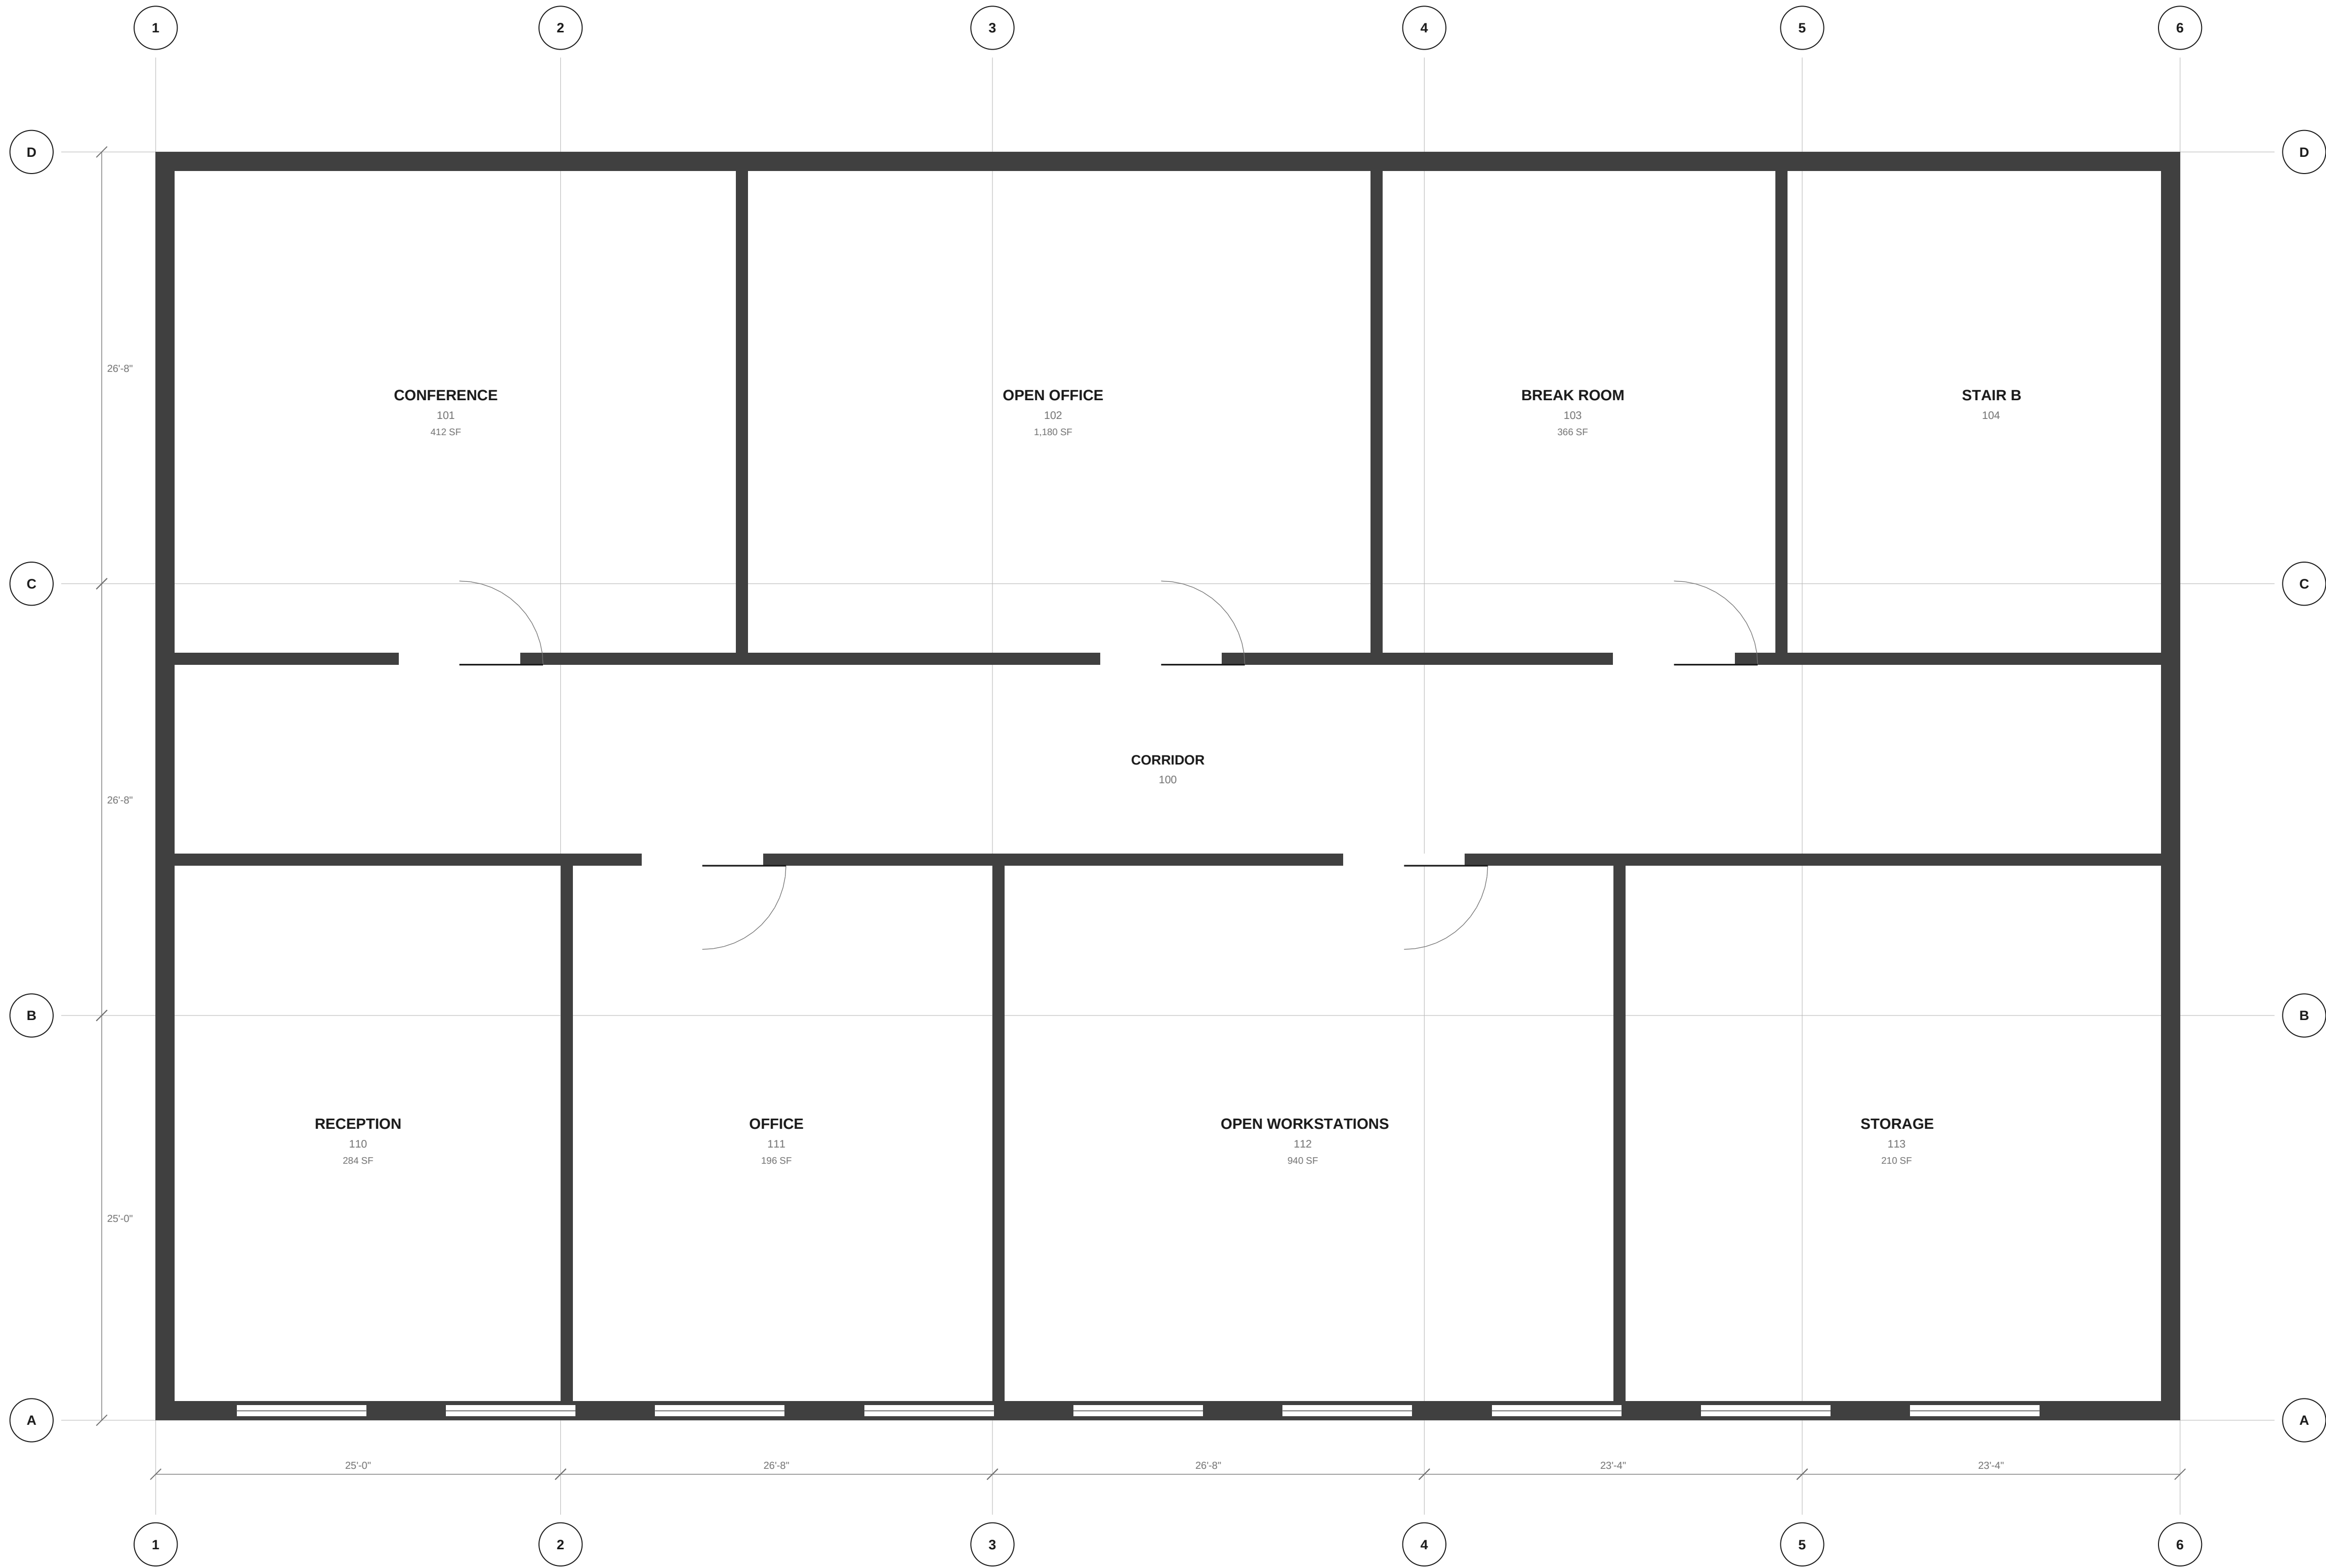




UMBC
FACILITIES MANAGEMENT


PROJECT
**RETREAT CENTER
BUILDING B**
1000 HILLTOP CIRCLE
BALTIMORE, MD 21250

CLIENT
UMBC FACILITIES MANAGEMENT


REVISIONS		
NO.	DATE	DESCRIPTION

ISSUED FOR CONSTRUCTION
2026-09-24
PROJECT NO. 2026-0418
DRAWN BY: JMP CHECKED BY: RS

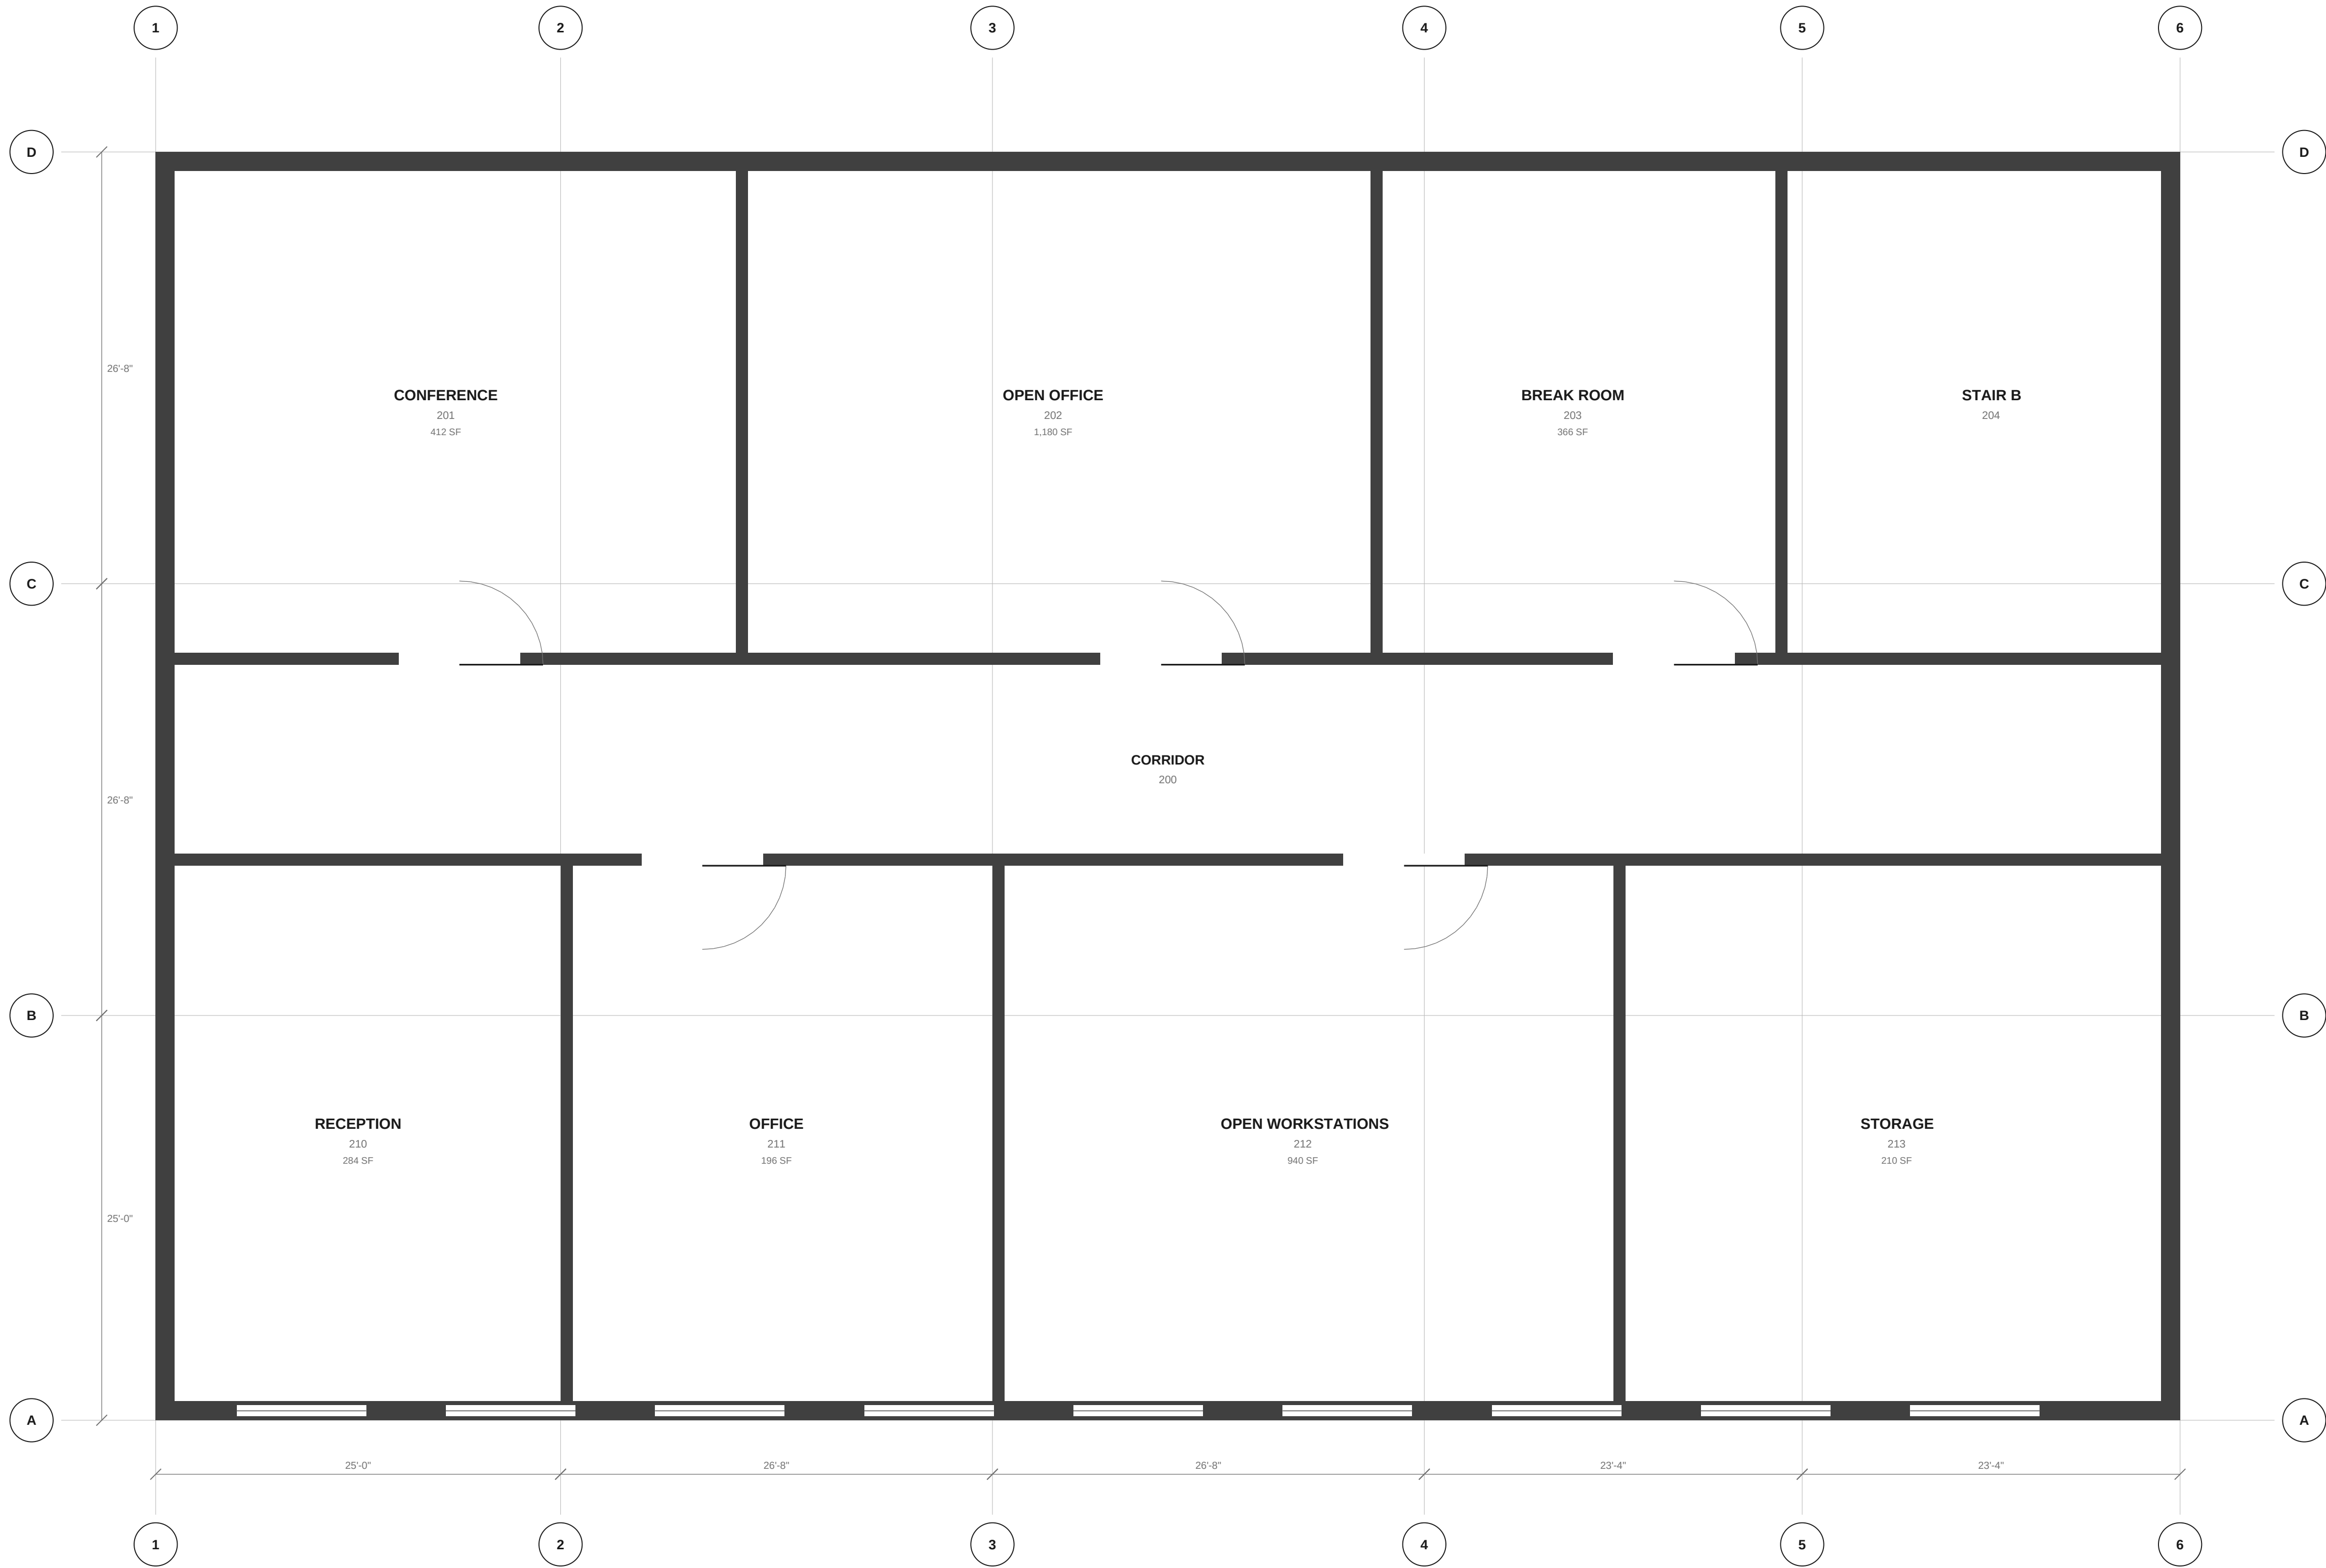


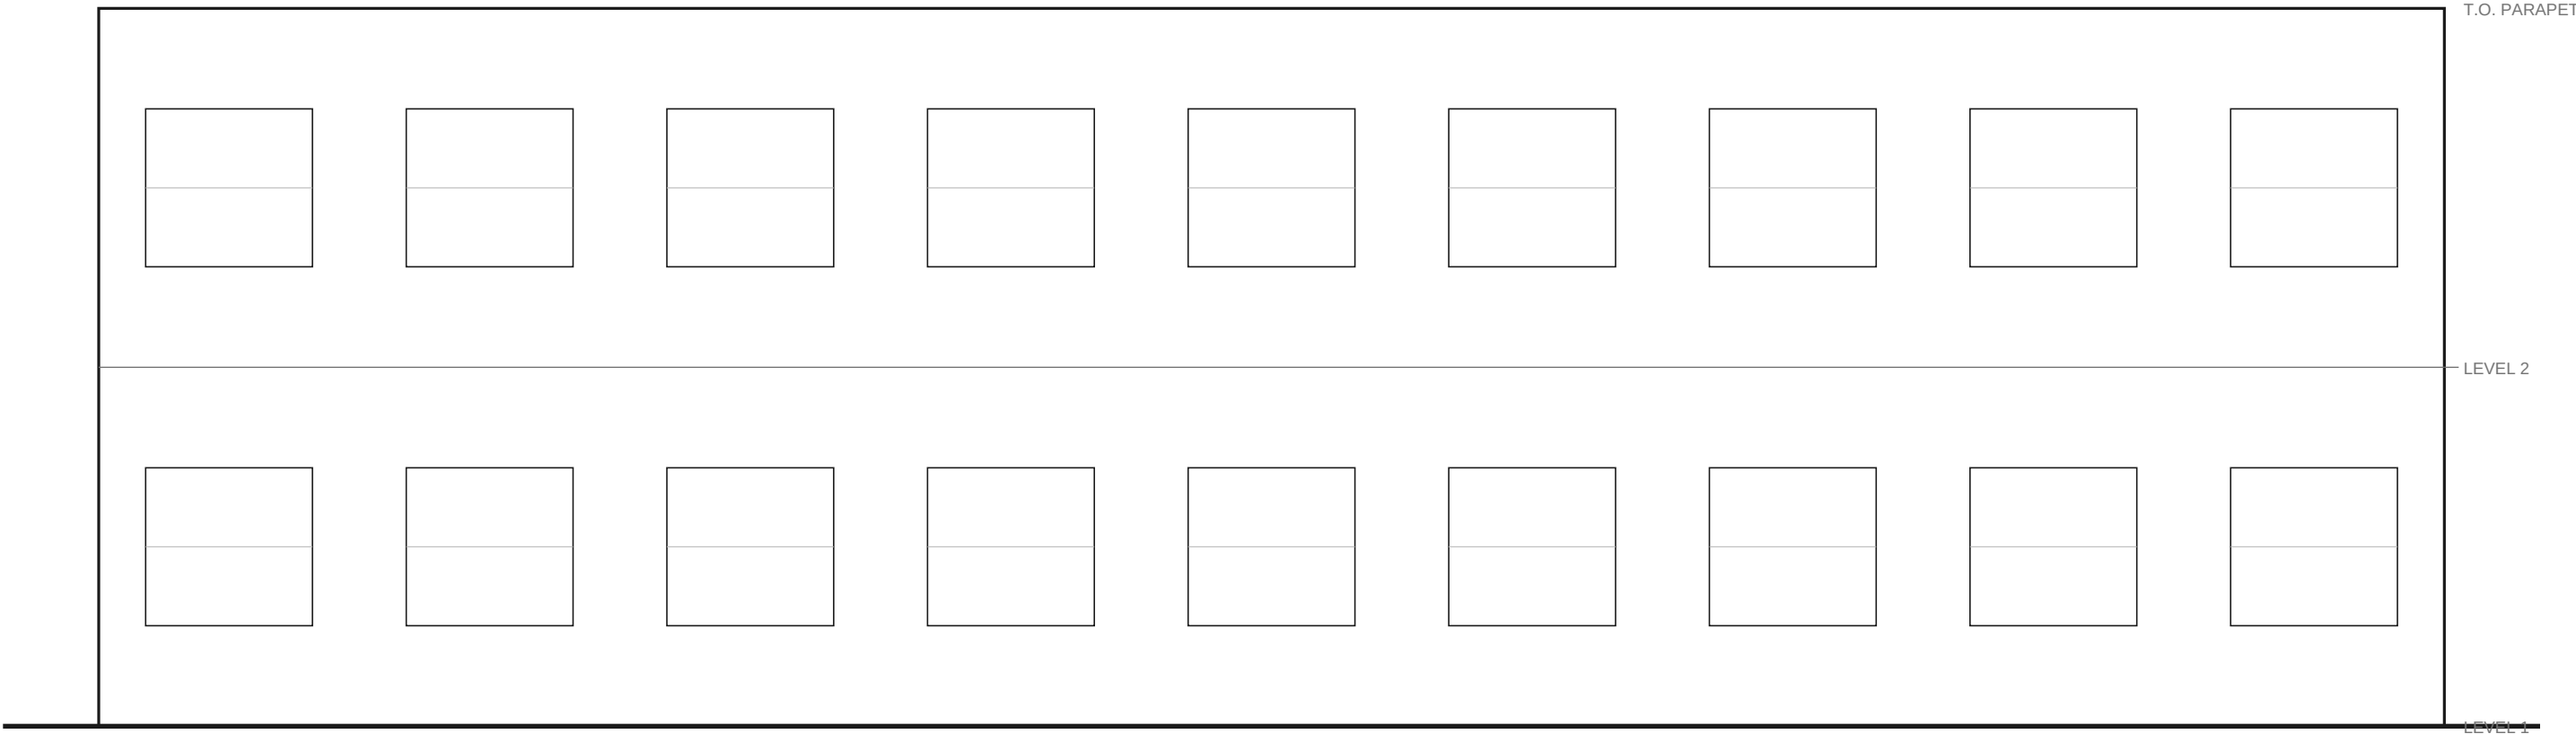

SOUTH ELEVATION

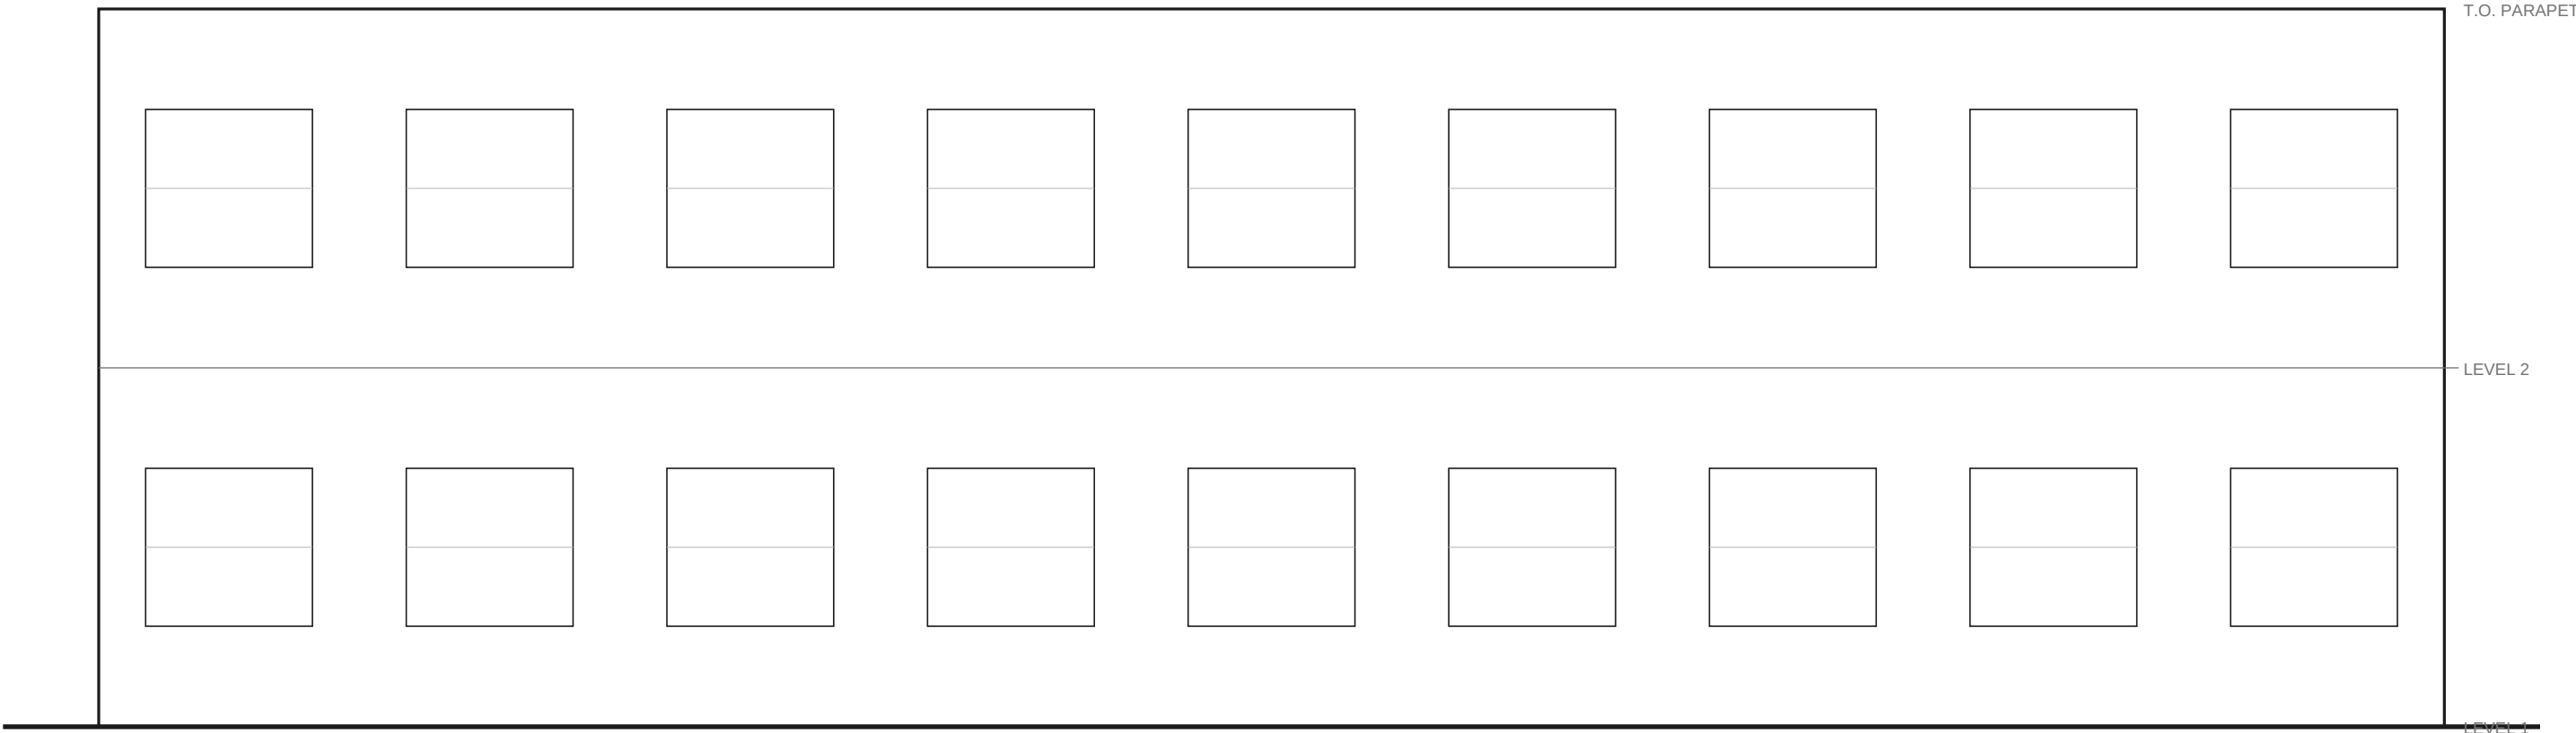

NORTH ELEVATION



EXTERIOR ELEVATIONS

UMBC

FACILITIES MANAGEMENT

PROJECT
RETREAT CENTER
BUILDING B
1000 HILLTOP CIRCLE
BALTIMORE, MD 21250

CLIENT
UMBC FACILITIES MANAGEMENT

REVISIONS		
NO.	DATE	DESCRIPTION

ISSUED FOR CONSTRUCTION
2026-09-24
PROJECT NO. 2026-0418
DRAWN BY: JMP CHECKED BY: RS

SHEET TITLE
EXTERIOR ELEVATIONS

SHEET NUMBER

A-201

PROJECT
RETREAT CENTER
BUILDING B
1000 HILLTOP CIRCLE
BALTIMORE, MD 21250

CLIENT
UMBC FACILITIES MANAGEMENT

REVISIONS		
NO.	DATE	DESCRIPTION

ISSUED FOR CONSTRUCTION
2026-09-24
PROJECT NO. 2026-0418
DRAWN BY: JMP CHECKED BY: RS

DOOR SCHEDULE

DOOR	ROOM SERVED	WIDTH	HEIGHT	TYPE	MATERIAL	FIRE RATING	HARDWARE SET	REMARKS
101A	CONFERENCE 101	3'-0"	7'-0"	F	SOLID CORE WD	20 MIN	HW-3	CARD READER
101B	CONFERENCE 101	3'-0"	7'-0"	F	SOLID CORE WD	—	HW-1	
102A	OPEN OFFICE 102	6'-0"	7'-0"	D	ALUM / GLASS	—	HW-7	PAIR, NARROW STILE
103A	BREAK ROOM 103	3'-0"	7'-0"	F	SOLID CORE WD	—	HW-1	
104A	STAIR B 104	3'-0"	7'-0"	F	HOLLOW METAL	90 MIN	HW-9	SELF-CLOSING, LABELED
110A	RECEPTION 110	3'-6"	7'-0"	D	ALUM / GLASS	—	HW-5	
111A	OFFICE 111	3'-0"	7'-0"	F	SOLID CORE WD	—	HW-1	
112A	OPEN WORKSTATIONS 112	6'-0"	7'-0"	D	ALUM / GLASS	—	HW-7	PAIR
113A	STORAGE 113	3'-0"	7'-0"	F	HOLLOW METAL	45 MIN	HW-4	
201A	CONFERENCE 201	3'-0"	7'-0"	F	SOLID CORE WD	20 MIN	HW-3	CARD READER
202A	OPEN OFFICE 202	6'-0"	7'-0"	D	ALUM / GLASS	—	HW-7	PAIR, NARROW STILE
203A	BREAK ROOM 203	3'-0"	7'-0"	F	SOLID CORE WD	—	HW-1	
204A	STAIR B 204	3'-0"	7'-0"	F	HOLLOW METAL	90 MIN	HW-9	SELF-CLOSING, LABELED
210A	RECEPTION 210	3'-6"	7'-0"	D	ALUM / GLASS	—	HW-5	
211A	OFFICE 211	3'-0"	7'-0"	F	SOLID CORE WD	—	HW-1	
212A	OPEN WORKSTATIONS 212	6'-0"	7'-0"	D	ALUM / GLASS	—	HW-7	PAIR
213A	STORAGE 213	3'-0"	7'-0"	F	HOLLOW METAL	45 MIN	HW-4	

- GENERAL NOTES
- ALL DIMENSIONS ARE TO FACE OF STUD UNLESS NOTED OTHERWISE.
 - CONTRACTOR TO VERIFY ALL ROUGH OPENINGS IN FIELD PRIOR TO FABRICATION.
 - FIRE-RATED ASSEMBLIES SHALL BE INSTALLED PER UL LISTING AND LABELED.
 - HARDWARE SETS ARE SCHEDULED IN SPECIFICATION SECTION 08 71 00.
 - REFER TO SHEET A-101 AND A-102 FOR DOOR LOCATIONS.